



DRC TRADE LINK LLP

EXPORTS: YOUR TRUSTED GLOBAL CERAMICS PARTNER

EXCLUSIVE EXPORT COLLECTION

Premium **Vitrified** Tiles Collection

Showcasing state-of-the-art manufacturing excellence, peerless durability, and breathtaking international designs.

600 / 600 mm

VITRIFIED TILES

600 / 1200 mm

VITRIFIED TILES

✓ High Gloss & Matt Finish ✓ Export Quality Standards ✓ Scratch & Stain Resistant

MOBILE NUMBER
+91 97634 99299

EMAIL ADDRESS
info@drctradelink.in

WEBSITE
www.drctradelink.in

OPTIMUS

SERIES

— MATT & RUSTIC FINISH —



600x600mm
GLAZED VITRIFIED TILES




GLAZED VITRIFIED TILES

BOLD & TIMELESS

IN 600x600mm

Elevate your interiors with the timeless allure of our Optimus Series. Each tile shimmers with clarity and precision, transforming spaces into statements of pure sophistication and refined luxury.

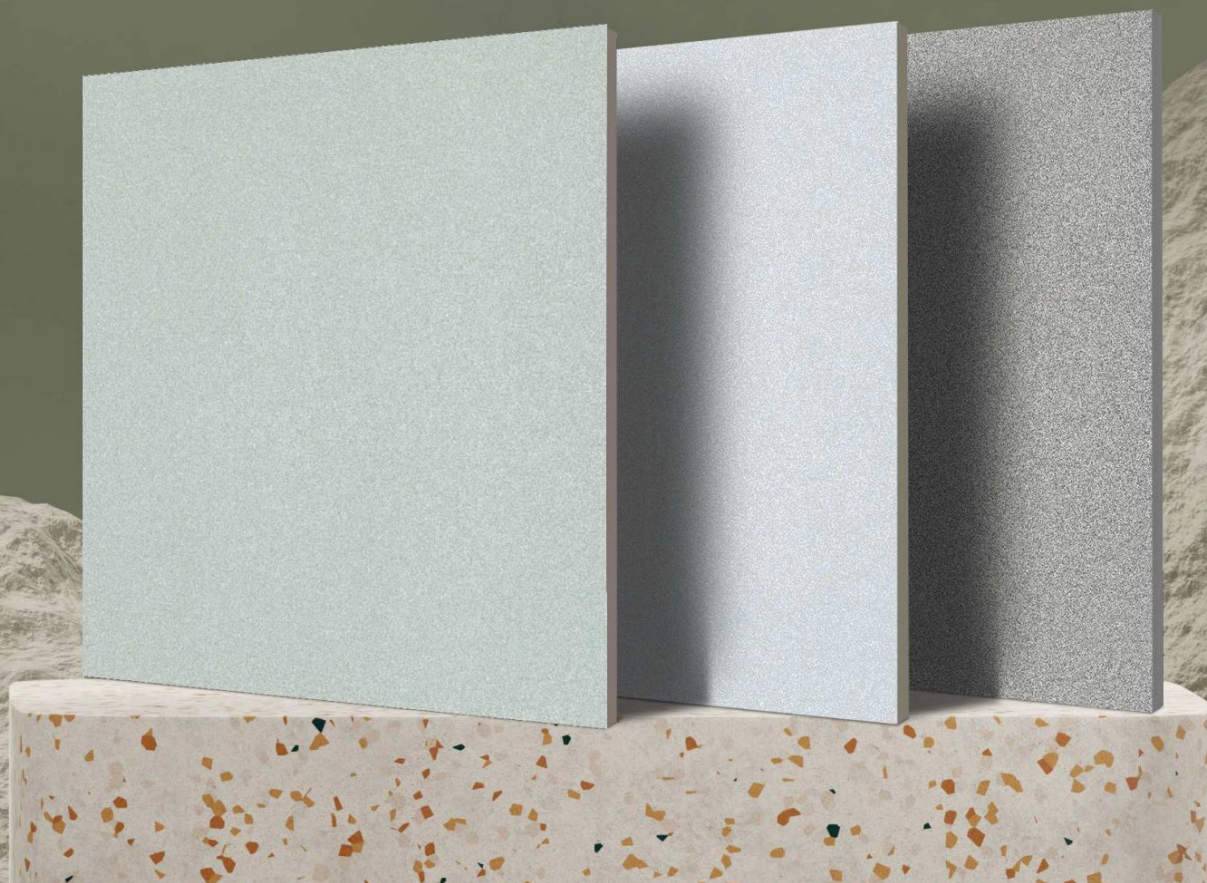

FEATURE & APPLICATION



DESIGN YOUR LUXURY
INTERIORS WITH A
TIMELESS CHARM

FEATURE

			
Long Lasting	Easy to Clean	Impact Resistance	Easy Installation
			
Hygienic Surface	Fire Resistance	Chemical Resistance	Thermal Shock Resistance
			
Frost Resistance	Low Water Absorption	Dimensional Stability	

APPLICATION

			
Residential	Corporate Building	Hotels, Cafes & Restaurants	Industrial
			
Hospitals	Airports	Schools & Colleges	Spas & Wellness Centers
			
Gymnasium	Halls & Corridors	Supermarkets & Malls	Religious Places

INDEX

ELEGANCE IN EVERY DETAIL

Discover the timeless beauty of the Optimus Series. Designed to mimic the luxurious charm of natural punch, these 600x600mm tiles blend sophistication with durability. Perfect for modern interiors, they bring a refined touch to any space.




OPTIMUS SERIES




Size:
600x600mm

Finish:
MATT FINISH

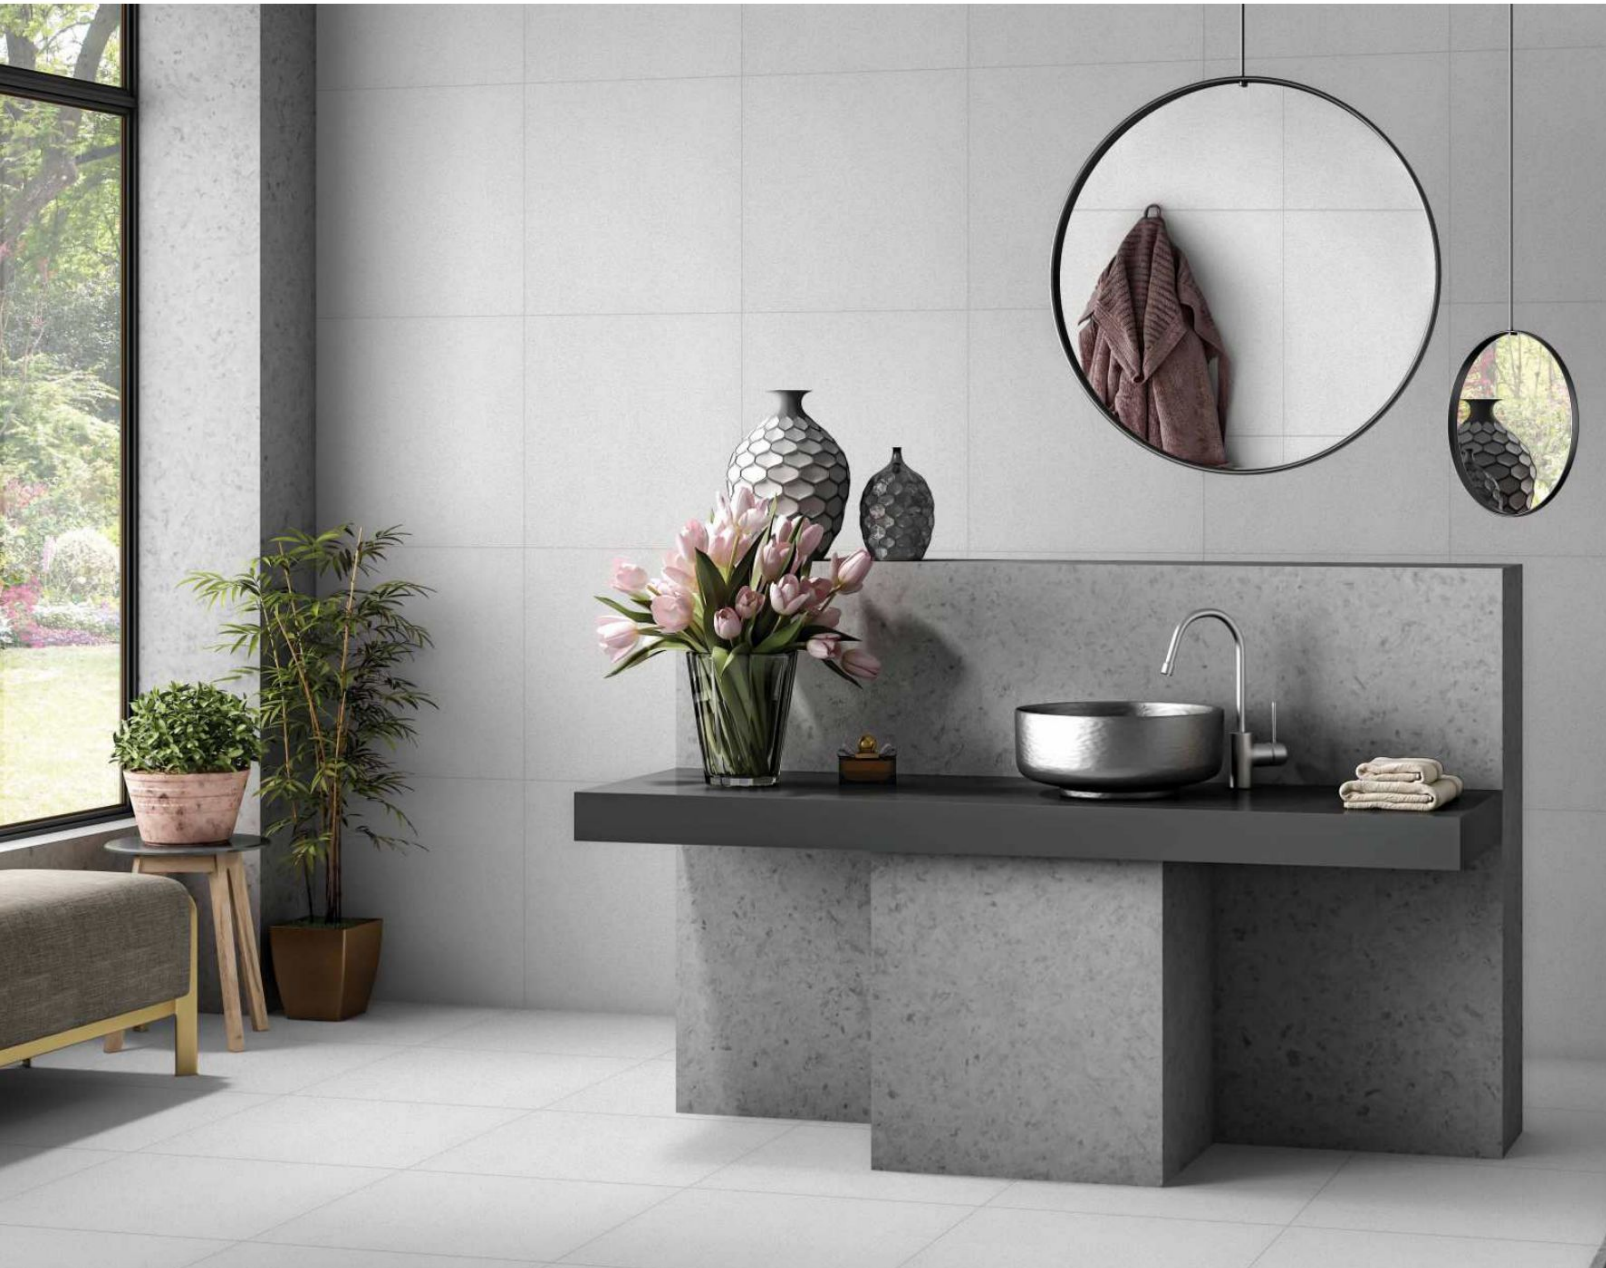

PLANET PEARL

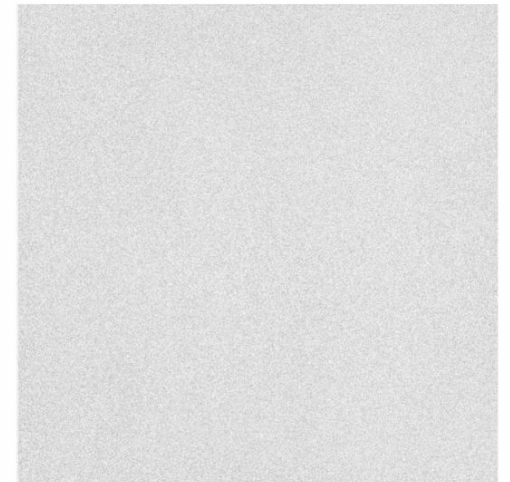

OPTIMUS SERIES




Size:
600x600mm

Finish:
MATT FINISH



PLANET GREY

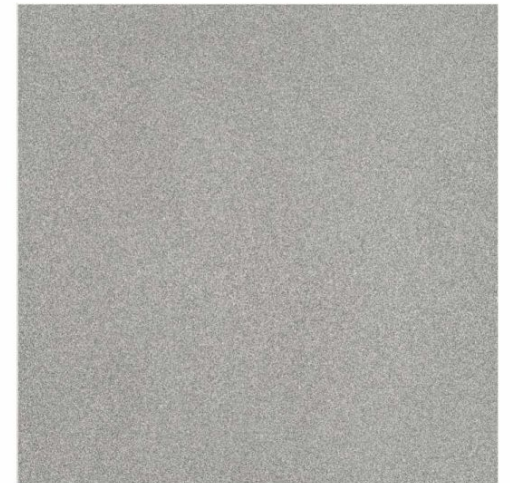

OPTIMUS SERIES




Size:
600x600mm

Finish:
MATT FINISH



PLANET SKY

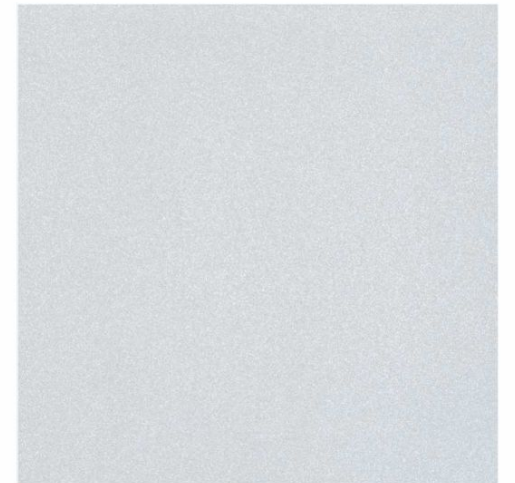

OPTIMUS SERIES




Size:
600x600mm

Finish:
MATT FINISH



PLANET AZURE

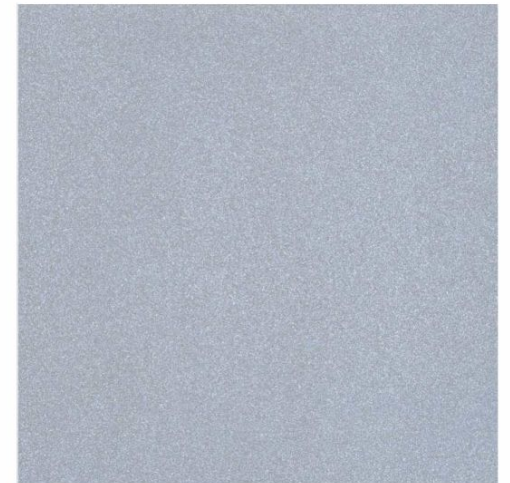

OPTIMUS SERIES




Size:
600x600mm

Finish:
MATT FINISH



PLANET LIGHT MINT

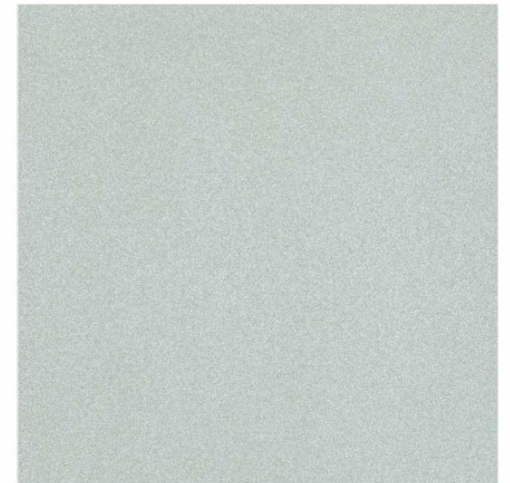

OPTIMUS SERIES




Size:
600x600mm

Finish:
MATT FINISH



PLANET MINT

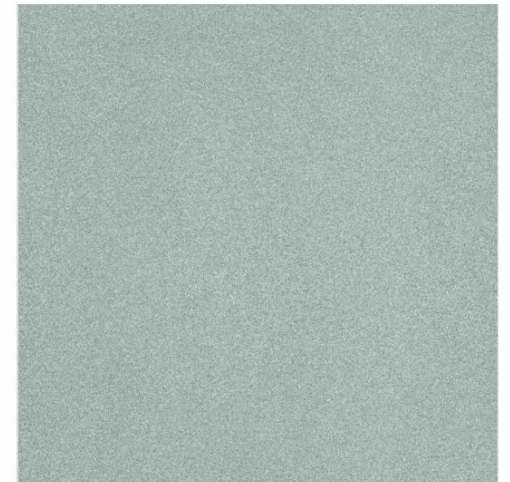

OPTIMUS SERIES




Size:
600x600mm

Finish:
MATT FINISH



PLANET PISTACHIO

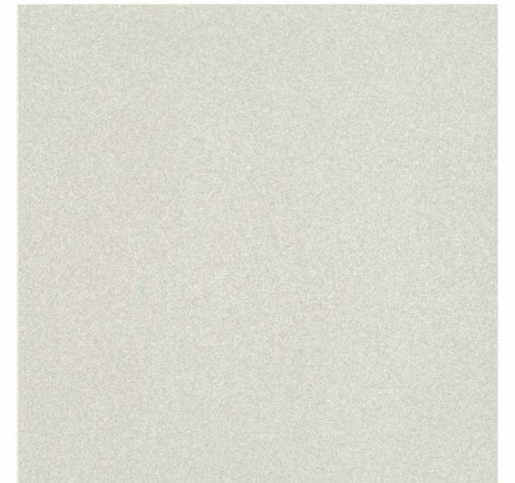

OPTIMUS SERIES




Size:
600x600mm

Finish:
MATT FINISH



PLANET OLIVE

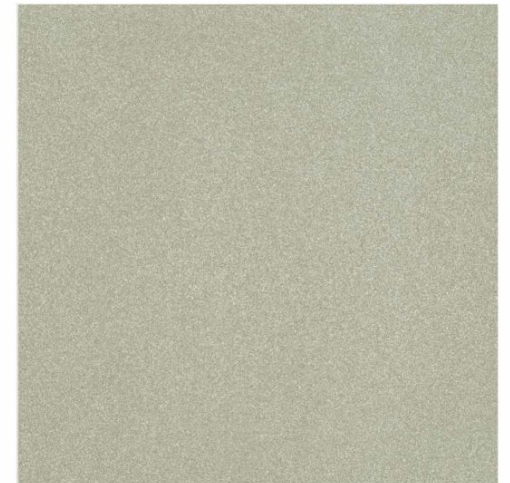



600x600mm

GLAZED VITRIFIED TILES

Discover

Punch-In Perfection

Step into a world where innovation meets elegance. Our punch-in tile collection offers effortless installation, precise alignment, and a flawless finish—designed for those who demand both style and simplicity.



OPTIMUS SERIES




Size:
600x600mm

Finish:
RUSTIC FINISH



MOSSCOW SKY

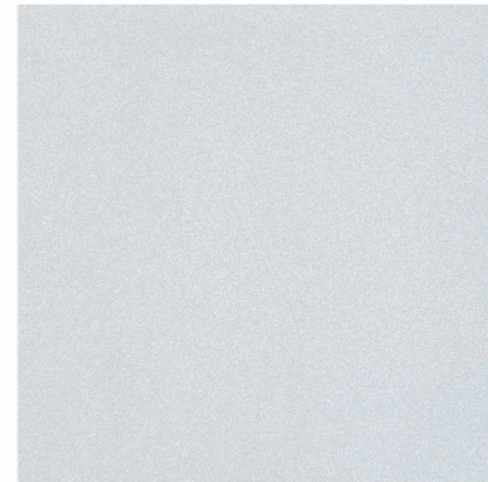

ZOOM VIEW

OPTIMUS SERIES




Size:
600x600mm

Finish:
RUSTIC FINISH



MOSSCOW AZURE

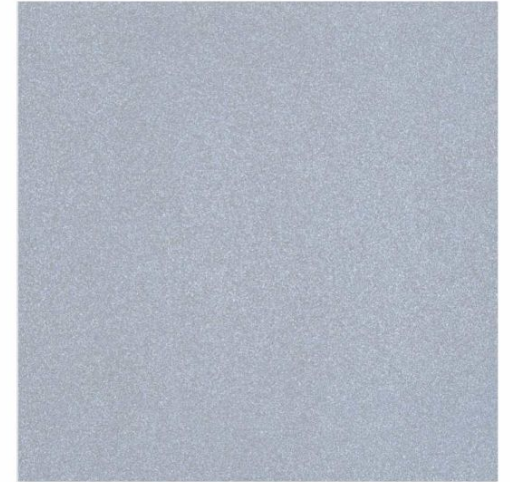

ZOOM VIEW

OPTIMUS SERIES




Size:
600x600mm

Finish:
RUSTIC FINISH



MOSSCOW SILVER

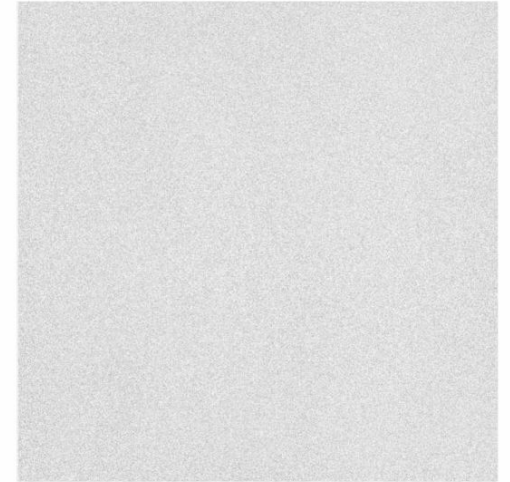

ZOOM VIEW

OPTIMUS SERIES




Size:
600x600mm

Finish:
RUSTIC FINISH



MOSSCOW DIM GREY

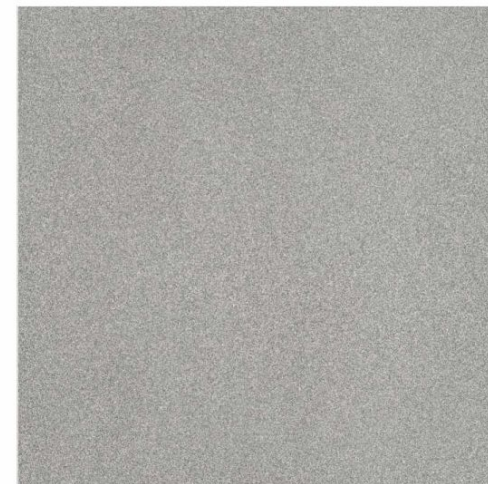

ZOOM VIEW

OPTIMUS SERIES




Size:
600x600mm

Finish:
RUSTIC FINISH



MOSSCOW LIGHT MINT

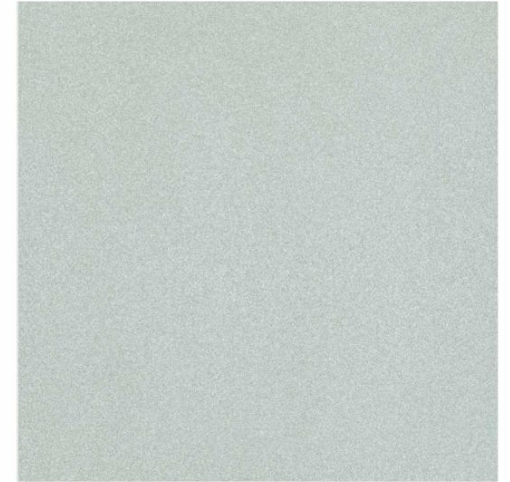


ZOOM VIEW

OPTIMUS SERIES




Size:
600x600mm

Finish:
RUSTIC FINISH

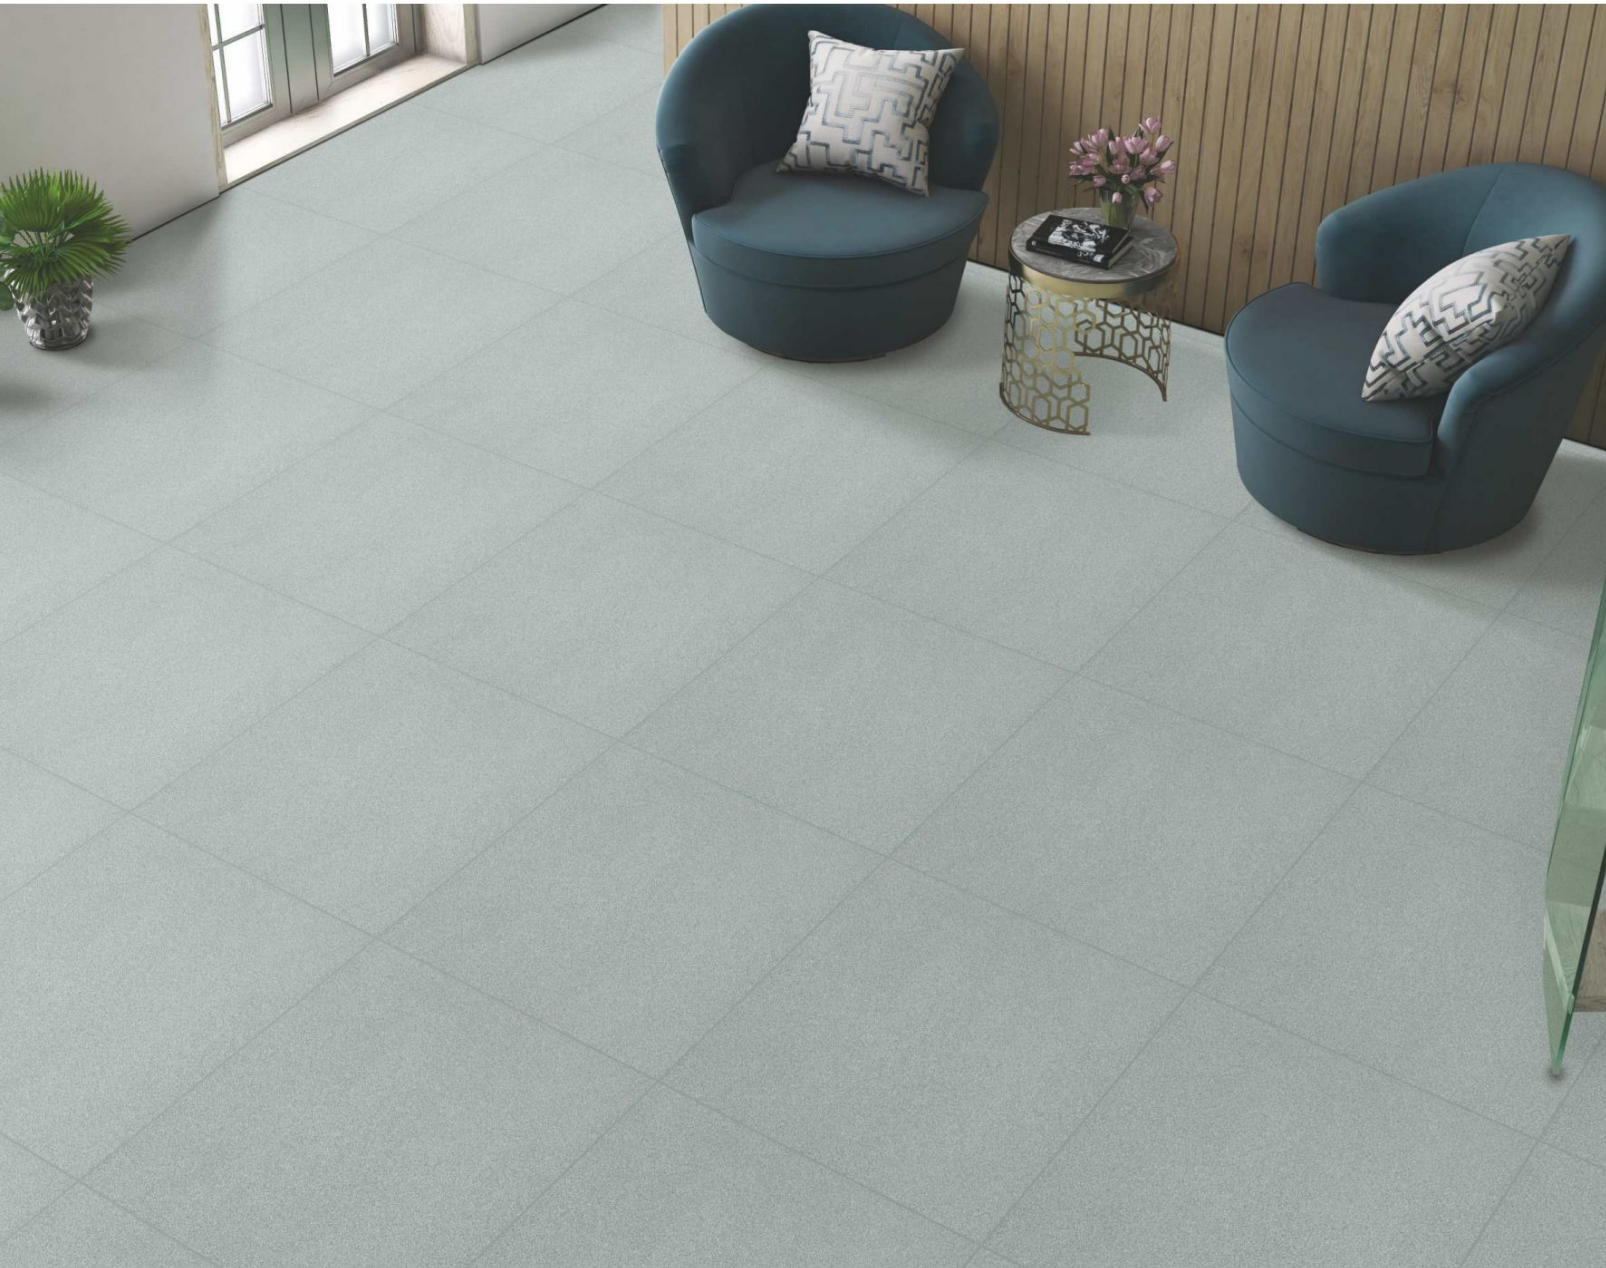

MOSSCOW MINT

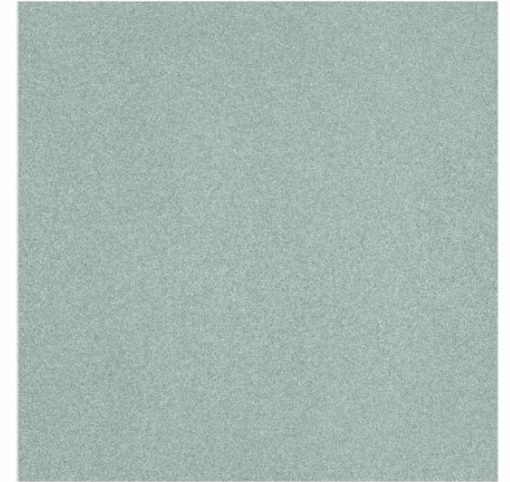

ZOOM VIEW

OPTIMUS SERIES




Size:
600x600mm

Finish:
RUSTIC FINISH



MOSSCOW PISTACHO

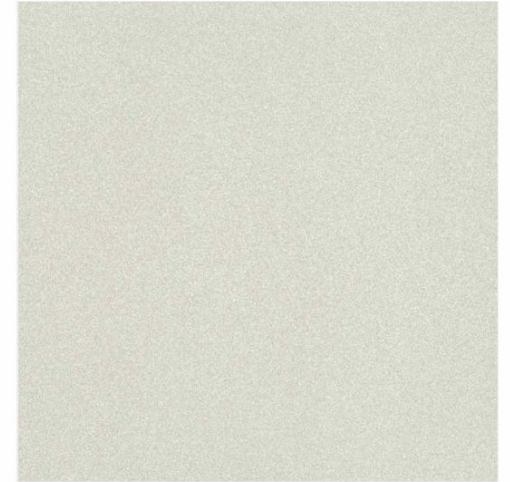

ZOOM VIEW

OPTIMUS SERIES




Size:
600x600mm

Finish:
RUSTIC FINISH



MOSSCOW OLIVE

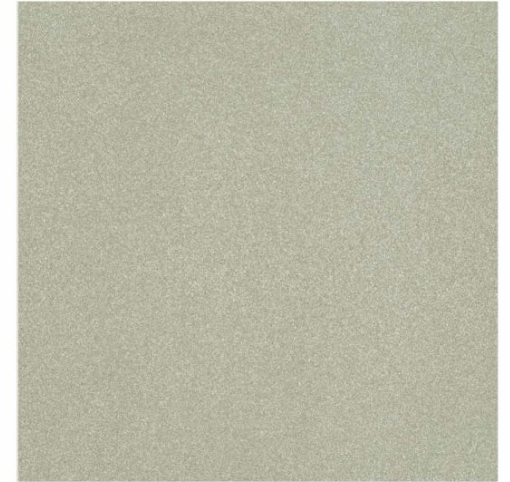

ZOOM VIEW

OPTIMUS SERIES




Size:
600x600mm

Finish:
RUSTIC FINISH



MOSSCOW TAN

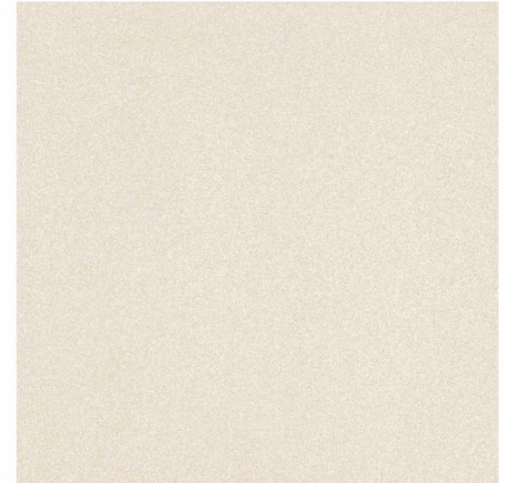

ZOOM VIEW

OPTIMUS SERIES



Size:
600x600mm

Finish:
RUSTIC FINISH



MOSSCOW WHEAT



ZOOM VIEW

OPTIMUS SERIES




Size:
600x600mm

Finish:
RUSTIC FINISH



MOSSCOW VANILLA

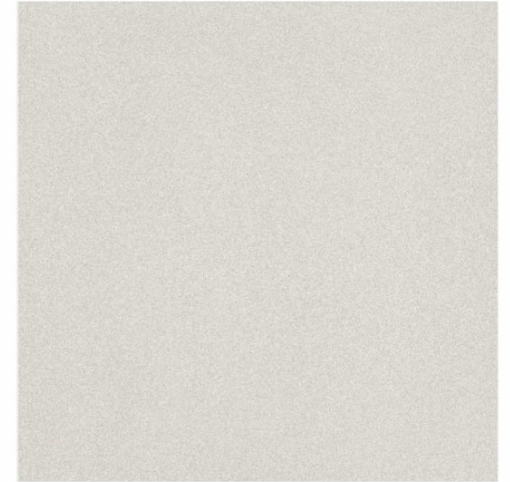

ZOOM VIEW

OPTIMUS SERIES




Size:
600x600mm

Finish:
RUSTIC FINISH



MOSSCOW TOFFEE

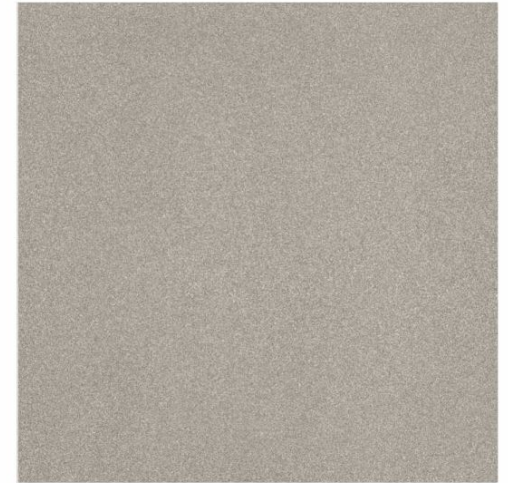


ZOOM VIEW

VARIATION GUIDE


DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made Ceramic tiles to resemble and look authentically identical to natural materials (Stone, Wood, Fabric), and it has become increasingly difficult in many cases, to distinguish between the two.


Recognizing this situation, it is necessary to be informed on the grade of Design & Pattern variation that is expected from these products. as a general reference the Design & Pattern guide below classifies a scale of ranges according to the degree of the variation.



V1 Uniform Appearance



V2 Slight Variation



V3 Moderate Variation



V4 Substantial Variation

THE CLASSIFICATION IS AS FOLLOW:

V1 Minimal Variation **V2** Slight Variation **V3** Random Variation **V4** Substantial Variation

HIGH DEFINITION IMAGE

While Laying the tiles please follow the arrow Mark on the back of the tiles For removing the wax from the surface of the tiles please use the soft cotton cloth for rubbing white any boric/talc powder

TEN COMMANDMENTS FOR LAYING TILES

1. Surface should be cleaned properly before installation.
2. Tiles should be segregated according to batch no. & manufacturing date
3. Dry fixing : lay the tiles in the desired patterns, shades and signs etc. before final laying.
4. Fixing by good quality tile-adhesive or with 1:4 cement & sand mortar.
5. Use of 2 to 5 mm SPACERS is recommended.
6. Do not use an iron hammer or some heavy material to press the tiles.
7. After 48 hours for bed curing, fill the joints with desired grouts.
8. Clean tiles with detergent powder or soap.
9. Cover the surface with plastic sheet / POP until it becomes ready for use.

TECHNICAL SPECIFICATION

TECHNICAL SPECIFICATION OF GVT

SIZE	Pcs. / Box	Coverage Area / Box
600x600mm	4 Pcs	1.44 sq. mtr.

CHARACTERISTIC	International Standards Group B1a- ISO 13006 Annx. G.	MEAN VALUE	TEST METHOD
Deviation In Length	± 0.60%	± 0.10%	ISO-10545-2
Deviation In Thickness	± 5.00%	± 4.00%	ISO-10545-2
Straightness Of Sides	± 0.50%	± 0.10%	ISO-10545-2
Rectangularity	± 0.60%	± 0.10%	ISO-10545-2
Surface Flatness	± 0.50%	± 0.15%	ISO-10545-2
Surface Quality (%)	Min. 6	Min. 6	ISO-10545-2
Scratch Hardness of Surface (Moh's scale)	A minimum of 95% of the tiles shall be free from visible defects	A minimum of 95% of the tiles shall be free from visible defects	ISO-10545-2
Modulus of Rupture	> 35N/mm ³	> 38N/mm ²	ISO-10545-4
Breaking Strength	> 1300 N	> 1500 N	ISO-10545-4
Water Absorption	< 0.50%	< 0.50%	ISO-10545-3
Stain Resistance	Stain Resistant	Stain Resistant	ISO-10545-14
Chemical Resistance	No Damage	No Damage	ISO-10545-13
Thermal Expansion	< 9 x 10 ⁻⁶	< 7 x 10 ⁻⁶	ISO-10545-8
Moisture Expansion	Nil	Nil	ISO-10545-10
Thermal Shock Resistance	No Damage	No Damage	ISO-10545-9
Resistance to Surface Abrasion	Manu. to State Abrasion Class	PEI class 3-5	ISO-10545-7
Bulk Density	> 2.00	> 2.20	ISO-10545-3

Note: Colour Shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserve the right to change the specifications without prior notice. Sometime variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.